



Features


- No power is required
- Transmit video signal via Unshielded Twisted Paired (UTP) wires
- Real time video transmission at distances up to 330m when passive receiver is used
- Real time video transmission at distances up to 1500m when active receiver is used
- Built-in TVS (Transient Voltage Suppressors) for surge protection
- 60dB crosstalk and noise immunity
- "Press-Fit" terminal block
- Compact size and easy to install
- Support NTSC, PAL and SECAM video format

Technical Specifications

- Frequency Response: 8MHz
- Attenuation: 0.5dB
- Common Mode Rejection Ratio (CMRR): 60dB
- Connectors: Male BNC and "Press-Fit" Terminal Blocks
- Impedance: BNC: 75 Ω , Terminal: 100 Ω
- Operating Temperature: -10 $^{\circ}$ C to +70 $^{\circ}$ C
- Storage Temperature: -30 $^{\circ}$ C to +70 $^{\circ}$ C
- Humidity: 0% to 95%
- Dimension: 39mm \times 16mm \times 19mm (Not Include Connectors)
- Weight: 88g (Pair)
- Material: ABS Plastic

Application Diagram

1) Passive-Passive UTP Video Transmission

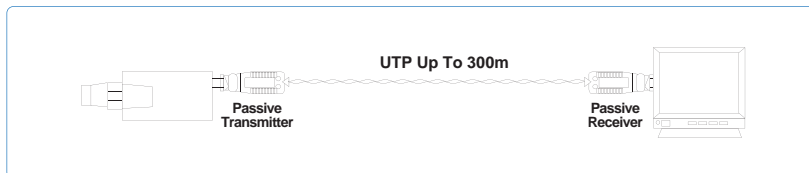

2) Passive -Active UTP Video Transmission

