


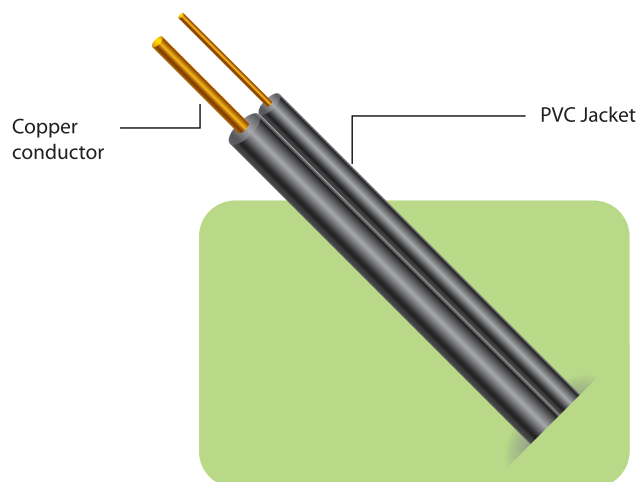

Product Standard

JB8734.4-1998

Instructions

- Using twisted multiple strand
- Bare copper wire as conductor
- PVC insulated
- 300/300V rated voltage U_0/U
- Keeping working temperature under 70°C for long-range operation

Technical Parameter

Style	Section (mm ²)	Insulation thickness (mm)	Out-dimension (mm)	Conductor resistance Ω/Km		70°C Min. Insulation resistance Ω/Km
				Copper core	Tinning copper	
AVRB 2 x 7/0.15	2 x 0.12	0.5	1.7 x 3.4	158	163	0.018
AVRB 2 x 12/0.15	2 x 0.2	0.6	2.1 x 4.2	92.3	95.0	0.017
AVRB 2 x 16/0.15	2 x 0.3	0.6	2.2 x 4.4	69.2	71.2	0.016
AVRB 2 x 23/0.15	2 x 0.4	0.6	2.4 x 4.8	48.2	49.6	0.014

Application

Applicable to interior wiring of appliance, meter, electronic equipment and automatic device with rated AC voltage U_0/U no greater than 300/300V.

Secuble Cable

Tel: 852 3723 2335

Site: www.secuble.comB/F, Fui Nam Bldg., 48-51 Connaught
Road West, Sheung Wan, Hong Kong.

* Designs and specifications are subject to change without notice.
Copyright © 2009 Secuble Cable Group, All rights reserved.